

# Stationary Samplers



SP5 A

# Model SP5 B

## Technical data at a glance



<b>Housing:</b>	PE with 50 mm insulation/PS/PC (GF10)
<b>Control:</b>	Microprocessor control, foil keypad, back lit display
<b>Thermostatic control:</b>	Self-contained, controlled cooling (ice-free), heating, 4° C (adjustable)
<b>Programming:</b>	12 freely programmable user programs, user-friendly software
<b>Interface:</b>	Mini-USB, optional: Ethernet RJ45, SDI-12 Optional: Modbus, Profibus DP
<b>Communication:</b>	Optional in combination with PC software or LAN/WLAN /GPRS (2 year ring memory FIFO at 1 min interval)
<b>Languages:</b>	Multi-language, selectable
<b>Signal inputs:</b>	2 x analogue: 0/4-20 mA, max. working resistance 500 Ohm 8 x digital (flow, event, 1 inputs can be programmed freely) Impuls length 60 ms, switching level 7-24 V Option: expandable with 4 x digital, 3 inputs can be programmed freely, and 8 x analogue 0-20 mA or 0-10 V
<b>Signal outputs:</b>	8 digital outputs, 1x of them as collective malfunction message Option: expandable with 8 digital, 5 are freely programmable
<b>Sampling method:</b>	Peristaltic pump 20-10.000 ml/Vacuum 20-350 ml (in PC: option glass)
<b>Sampling modes:</b>	Time (CT, CV), Flow (VT, CV) or (CT, VV), variable Flow only peristaltic pump or option for vacuum-system; Event, and Manual sampling (Flow modes are controlled by an external flowmeter signal)
<b>Suction height:</b>	Vacuum 7,5 m (at 1000 hPa), option: 8,5 m or up to 15m Peristaltic pump 8,5 m (at 1000 hPa)
<b>Bottle variants:</b>	Plastic: 1 x 25 L; 4 x 14 L; 4 x 10 L; 12 x 3,0 L; 24 x 1 L; 24 x 1 L Glass: 12 x 2 L; 24 x 1L
<b>Overall dimensions:</b>	(h x w x d) 1100 (1640 with opened top) x 760 x 775 mm
<b>Weight:</b>	approx. 75 kg with composite container, higher weight when using several bottles and/or glass bottles
<b>Ambient temperature:</b>	-20° to +50° C
<b>Sample temperature:</b>	0° to +40° C
<b>Standards:</b>	CE, sampling according to ISO 5667-10, EN 16479

SP5 B – Compact device in plastic housing,  
especially suitable for corrosive environment

Your advantages:

- > Available with peristaltic pump and vacuum system
- > Unrivalled measuring device for volume determination (Peristaltic pump)
- > Minimal effort for calibration
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > LAN/W-LAN/GPRS communication (Option)
- > Easy cleaning
- > Modern and ergonomic design
- > Big variant of bottle configuration
- > Well insulated



Dosing system peristaltic pump



# Model SP5 S

## Technical data at a glance

<b>Housing:</b>	Stainless steel with 40 mm insulation (Material: 1.4301/SS304)/PS/C (GF 10). Option: (Option: 1.4571/SS316), Option: EPOXY coated)
<b>Control:</b>	Microprocessor control, foil keypad, back lit display
<b>Thermostatic control:</b>	Self-contained, controlled cooling (ice-free), heating, 4° C (adjustable)
<b>Programming:</b>	12 freely programmable user programs, user-friendly software
<b>Interface:</b>	Mini-USB, optional: Ethernet RJ45, SDI-12 Optional: Modbus, Profibus DP
<b>Communication:</b>	optional in combination with PC software or LAN/WLAN/GPRS (2 year ring memory FIFO at 1 min interval)
<b>Languages:</b>	Multi-language, selectable
<b>Signal inputs:</b>	2 x analogue: 0/4-20 mA, max. working resistance 500 Ohm 8 x digital (flow, event, 1 inputs can be programmed freely) Impuls length 60 ms, switching level 7-24 V Option: expandable with 4 x digital, 3 inputs can be programmed freely, and 8 x analogue 0-20 mA or 0-10 V
<b>Signal outputs:</b>	8 digital outputs, 1x of them as collective malfunction message Option: expandable with 8 digital, 5 are freely programmable
<b>Sampling method:</b>	Vacuum 20-350 ml (in PC; option in glass)/Peristaltic pump 20-10.000 ml
<b>Sampling modes:</b>	Time (CT, CV), Flow (VT, CV) or (CT, VV), (variable Flow only peristaltic pump or option for vacuum-system); Event and Manual sampling (Flow modes are controlled by an external flowmeter signal)
<b>Suction height:</b>	Vacuum 7,5 m (at 1000 hPa), option: 8,5 m or up to 15m Peristaltic pump 8,5 m (at 1000 hPa)
<b>Bottle variants:</b>	Plastic: 1 x 25 L; 1 x 50 L; 2 x 10 L; 4 x 6 L; 4 x 10 L; 4 x 14 L; 12 x 3,0 L Glass: 12 x 2 L; 24 x 1 L
<b>Overall dimensions:</b>	(h x w x d) 1290 (1.890 with opened top) x 690 x 645 mm as measuring station: 1470 (2070 with opened top) x 690 x 645 mm
<b>Weight:</b>	approx. 100 kg with composite container, higher weight when using several bottles and/or glass bottles
<b>Ambient temperature:</b>	-20° to +43° C
<b>Sample temperature:</b>	0° to +40° C
<b>Standards:</b>	CE, sampling according to ISO 5667-10, EN 16479



Sampler in stainless steel housing. also available  
as measuring station

Your advantages:

- > Available with peristaltic pump and vacuum system
- > Unrivalled measuring device for volume determination (Peristaltic pump)
- > Minimal effort für calibration
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > LAN/W-LAN/GPRS communication (Option)
- > Easy cleaning
- > Modern and ergonomic design
- > Big variant of bottle configuration and dosing systems



Fold-out plate for easy access  
and maintenance works



Vacuum dosing system with  
plastic vessel



# Model SP5 A

## Technical data at a glance

<b>Housing:</b>	Stainless steel with 40 mm insulation (Material: 1.4301/SS304)/PS/C (GF 10) (Option: 1.4571/SS316: Option: EPOXY coated)
<b>Control:</b>	Microprocessor control, foil keypad, back lit display
<b>Thermostatic control:</b>	Self-contained, controlled cooling (ice-free), heating, 4° C (adjustable)
<b>Programming:</b>	12 freely programmable user programs, user-friendly software
<b>Interface:</b>	Mini-USB; optional: Ethernet RJ45, SDI-12; optional: Modbus, Profibus DP
<b>Communication:</b>	Optional in combination with PC software or LAN/WLAN /GPRS (2 year ring memory FIFO at 1 min interval)
<b>Languages:</b>	Multi-language, selectable
<b>Signal inputs:</b>	2 x analogue: 0/4-20 mA, max. working resistance 500 Ohm 8 x digital (flow, event, 1 inputs can be programmed freely) Impuls length 60 ms, switching level 7-24 V Option: expandable with 4 x digital, 3 inputs can be programmed freely, and 8 x analogue 0-20 mA or 0-10 V
<b>Signal outputs:</b>	8 digital outputs, 1x of them as collective malfunction message Option: expandable with 8 digital, 5 are freely programmable
<b>Sampling method:</b>	Vacuum 20-350 ml (in PC; option in glass)/Peristaltic pump 20-10.000 ml
<b>Suction height:</b>	Vacuum 7,5 m (at 1000 hPa), option: 8,5 m or up to 15 m Peristaltic pump 8,5 m (at 1000 hPa)
<b>Sampling modes:</b>	Time (CT, CV), Flow (VT, CV) or (CT, VV), (variable Flow only peristaltic pump or option for vacuum-system); Event and Manual sampling (Flow modes are controlled by an external flowmeter signal)
<b>Bottle variants:</b>	2 x 10 L PE/4 x 5 L PE/12 x 1,6 L Glas Duran 50/24 x 2 L Glas Duran 50
<b>Overall dimensions:</b>	(h x w x d) 1.290 (1.930 with opened top) x 690 x 645 mm 24 x 2 L: 1400 (2.175*) x 800 x 850 mm
<b>Weight:</b>	approx. 115 kg with 2x10 L, higher weight when using several bottles and/or glass bottles
<b>Ambient temperature:</b>	-20° to +43° C
<b>Sample temperature:</b>	0° to +40° C
<b>Standards:</b>	CE, sampling according to ISO 5667-10, EN 16479






Ideal for automatic and continuous operation without the need of personnel. Also available with measuring rack

## Your advantages:

- > Available with peristaltic pump, vacuum oder Bypass system
- > Unrivalled measuring device for volume determination (Peristaltic pump)
- > Minimal effort für calibration
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > LAN/W-LAN/GPRS communication (Option)
- > Easy cleaning
- > Modern and ergonomic design
- > Big variant of bottle configuration and dosing systems
- > Automatic bottle emptying
- > Automatic bottle rinsing



Easy access for connection and maintenance works



Distributor with glass bottles, placed on a telescopic drawer



# Model SP Zone 1

## Technical data at a glance

<b>Housing:</b>	Stainless steel with 40 mm insulation, [Material: 1.4301/SS304]/PS/C (GF 10) [Option: 1.4571/SS316; Option: EPOXY coated]
<b>Control:</b>	Microprocessor control, foil keypad, back lit display
<b>Thermostatic control:</b>	Self-contained, controlled cooling (ice-free), heating, 4° C (adjustable)
<b>Programming:</b>	12 freely programmable user programs, user-friendly software
<b>Interface:</b>	Mini-USB (pay attention to ATEX certification)
<b>Communication:</b>	on request (pay attention to ATEX certification)
<b>Languages:</b>	Multi-language, selectable
<b>Signal inputs:</b>	2 x analogue: 0/4-20 mA, (galvanically separated) max. working resistance 500 Ohm 8 x digital (flow, event, 1 inputs can be programmed freely) Impuls length 60 ms, switching level 7-24 V
<b>Signal outputs:</b>	8 digital outputs, 1x of them as collective malfunction message Option: expandable with 8 digital, 5 are freely programmable
<b>Sampling method:</b>	Vacuum-System 20-350 ml (in glass) Optional: Vacuum-System 20-500 ml in glass
<b>Suction height:</b>	max. 6 m (at 1000 hPa),
<b>Sampling modes:</b>	Time (CT, CV), Flow (VT, CV) Event and Manual sampling
<b>Bottle variants:</b>	Plastic: 1 x 25 L; 1 x 50 L; 2 x 10 L; 4 x 6 L; 4 x 10 L; 4 x 14 L; 12 x 3,0 L Glass: 12 x 2 L
<b>Overall dimensions:</b>	(HxWxD) 1400 (2175*) x 800 x 850 mm * with opened top
<b>Weight:</b>	approx. 120 kg with composite container, higher weight when using several bottles and/or glass bottles
<b>Ambient temperature:</b>	-20° to +43° C
<b>Sample temperature:</b>	0° to +40° C
<b>Standards:</b>	CE, sampling according to ISO 5667-10, EN 16479






Ex-Zone 1,  
Protection class II 2G Ex IIB T3 Gb X  
or  
II 2G Ex IIB T4 Gb X without heating

Your advantages:

- > Proven MAXX technology for hazardous areas
- > Optionally with DK-system for pressure lines
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > Easy cleaning
- > Modern and ergonomic design



Pneumatic dosing system with capacitive Ex-sensor



Controlhousing in accordance with ATEX



# Model SP Zone 2

## Technical data at a glance

<b>Housing:</b>	Stainless steel with 40 mm insulation (Material: 1.4301/SS304)/PS/C (GF 10) (Option: 1.4571/SS316: Option: EPOXY coated)
<b>Control:</b>	Microprocessor control, foil keypad, back lit display
<b>Thermostatic control:</b>	Self-contained, controlled cooling (ice-free), heating, 4° C [adjustable]
<b>Programming:</b>	12 freely programmable user programs, user-friendly software
<b>Interface:</b>	Mini-USB, [pay attention to ATEX certification]
<b>Communication:</b>	on request [pay attention to ATEX certification]
<b>Languages:</b>	Multi-language, selectable
<b>Signal inputs:</b>	2 x analogue: 0/4–20 mA, [galvanically separated] 8 x digital [flow, event, 1 inputs can be programmed freely]
<b>Signal outputs:</b>	8 digital outputs, 1x of them as collective malfunction message option: expandable with 8 digital, 5 are freely programmable
<b>Sampling method:</b>	Vacuum-System 20–350 ml in glass Optional: Vacuum-System 20–500 ml in glass
<b>Suction height:</b>	max. 6 m [at 1000 hPa],
<b>Sampling modes:</b>	Time [CT, CV], Flow [VT, CV] Event and Manual sampling
<b>Bottle variants:</b>	Plastic: 1 x 25 L; 1 x 50 L; 2 x 10 L; 4 x 6 L; 4 x 10 L; 4 x 14 L; 12 x 3,0 L Glass: 12 x 2 L
<b>Overall dimensions:</b>	[HxWxD] 1470 (2245*) x 690 x 645 mm * with opened top
<b>Weight:</b>	approx. 100 kg with composite container, higher weight when using several bottles and/or glass bottles
<b>Ambient temperature:</b>	-20° to +43° C
<b>Sample temperature:</b>	0° to +40° C
<b>Standards:</b>	CE, sampling according to ISO 5667-10, EN 16479




Sampler in stainless steel housing  
for hazardous areas of Zone II  
Explosion protection class: II 3G EX nC/nR/iC IIB T3 Gc

## Your advantages:

- > Proven MAXX technology for hazardous areas
- > Optionally with DK-system for pressure lines
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > Easy cleaning
- > Modern and ergonomic design



Pneumatic distributor and heating according to ATEX



Fold-out plate with Ex-valves and diaphragm vacuum Ex-pump



# Model SP5 DK

## Technical data at a glance

<b>Housing:</b>	Version without housing (PVC/stainless steel) Option: Stainless steel housing with cooling/heating ; (material: 1.4301/SS304)/ PS/C (GF 10). (Option: 1.4571/SS316; Option: EPOXY coated)
<b>Control:</b>	Microprocessor control, foil keypad, back lit display
<b>Programming:</b>	12 freely programmable user programs, user-friendly software
<b>Interface:</b>	Mini-USB, optional: Ethernet RJ45, SDI-12; optional: Modbus, Profibus DP
<b>Communication:</b>	Optional in combination with PC software or LAN/WLAN /GPRS (2 year ring memory FIFO at 1 min interval)
<b>Languages:</b>	Multi-language, selectable
<b>Signal inputs:</b>	2 x analogue: 0/4-20 mA, max. working resistance 500 Ohm 8 x digital (flow, event, 1 inputs can be programmed freely) Impuls length 60 ms, switching level 7-24 V Option: expandable with 4 x digital, 3 inputs can be programmed freely, and 8 x analogue 0-20 mA or 0-10 V
<b>Signal outputs:</b>	8 digital outputs, 1x of them as collective malfunction message Option: expandable with 8 digital, 5 are freely programmable
<b>Sampling method:</b>	Double ball valve system with dosing tube mounted between the two valves. Fixed volume as specified, between 25 and 500 ml, up to 25 bar
<b>Sampling modes:</b>	Time (CT, CV), Flow (VT, CV), Event and Manual sampling
<b>Bottle variants:</b>	1 x 25 L PE in stainless steel housing: 1 x 25 L; 4 x 14 L; 4 x 6,3 L; 12 x 3,0 L
<b>Overall dimensions:</b>	Wall-mounted version: control unit (hwxwd) 350 x 450 x 170 mm dosing unit (hwxwd) 570 x 120 x 200 mm version in stainless steel housing (hwxwd): 1470 (2245*) x 690 x 645 mm (* with opened top)
<b>Weight:</b>	approx. 15 kg (wall-mounted version); approx. 100 kg (version with stainless steel housing)
<b>Ambient temperature:</b>	0° to +45° C
<b>Sample temperature:</b>	0° to +40° C
<b>Standards:</b>	CE


Wall-mounted device for sampling of sludge and from pressurised lines up to 25 bar

Your advantages:

- > Almost no »dead-volume« because of purging
- > For sample medium with high solids content (Sludge)
- > Can also be used for non-conductive liquids, such as e.g. oil
- > Device can also be combined with thermostatic sampling cabinet
- > LAN/UMTS/GPRS communication (Option)
- > For high pressure up to 25 bar
- > Clear operating structure and simple programming
- > Easy cleaning



Automatic protection device,  
interlocking



Pressure-resistant ball valve






# Your Notes







Mess- und Probenahmetechnik GmbH

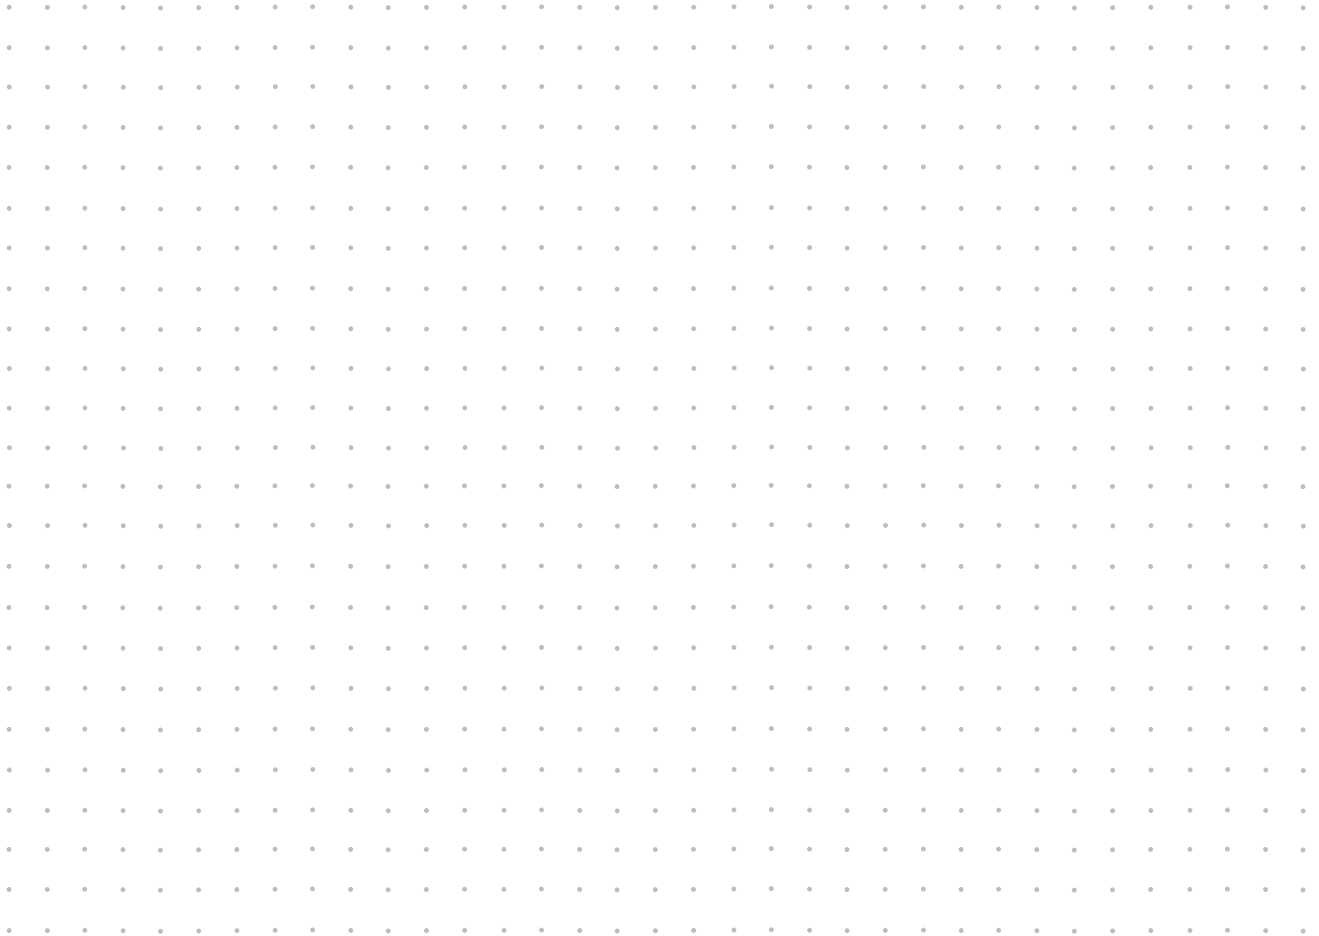



# MAXX<sup>®</sup>

Mess- und Probenahmetechnik GmbH

MAXX GmbH  
Hechinger Straße 41  
72414 Rangendingen, Germany

Phone +49 (0)7471 98481 0  
Fax +49 (0)7471 9848144

[www.maxx-gmbh.com](http://www.maxx-gmbh.com)  
[info@maxx-gmbh.com](mailto:info@maxx-gmbh.com)



Baden-Württemberg

 Innovation made in Germany